1. Centre aim point 2. Distance display 3. Distance unit 4. Low battery indicator 5. Distance measuring quality 6. Laser emission, pulses when in use 7. Modes: • RAIN - eliminates rain interference REFL - for use in foggy conditions >150 - eliminates interfering objects within 150m eg. electrical wires and branches 888 **METRES** RAIN Ð YARDS 0 REFT >150 0 QUALITY BATT LASER

LCD DISPLAY

OPERATION


- · Adjust the eyepiece to make the object clear in the
- field of vision Click the ON button then align the centre aim point to the desired object
- Re-click the ON button for approximately 3 seconds to display the distance
 - The RF5600 will turn off automatically The RF5600 is usually in standard mode, to change
 - the mode press the MODE button and choose the appropriate option To change the unit of distance hold the MODE button for 3 seconds • If the RF5600 is unable to give a reading it will display '___' • Distance measuring is affected by the weather and the characteristics of an object.

WARNING

pressed together

will be rendered invalid

- DO NOT clean the lens with hands, please use the appropriate lens cloth DO NOT invert the battery • The battery should be taken out of the RF5600 if not in use for long periods of time The RF5600 should be stored in a cool dry place
- Optimum operating temperature -20 C / 40 C The MODE and ON button should not be The RF5600 should only be repaired by qualified professionals. Please DO NOT disassemble or repair the product on your own or your warranty

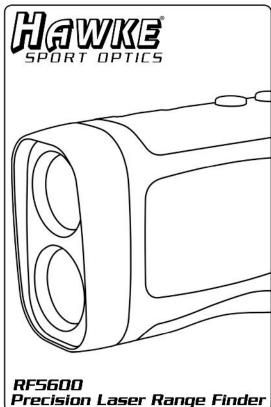

OVERVIEW

The RF5600 is a precision laser range finder combined with the function of the common telescope, it is capable of measuring objects up to a distance of 600m. The RF5600 requires a 3V CR2 battery and has a power save function enabling it to turn off when not in use. The products lightweight

battery and has a power save function enabling it to turn off when not in use. The products lightweight compact design makes it convenient to carry. The RF5600 is commonly used in hunting, golf, site survey and construction, it is also capable of

measuring small objects such as electrical wires. RF5600

- I. MODE button 2. ON button
- 3. Telescope objective 4. Laser reception objective 5. Battery compartment 6. Adjustable eyepiece









SPECIFICATION

- Range: 5-600m
- Measurement pattern: semiconductor laser
 measurement (harmless for eyes)
- Error in measurement: + Im +0.1%
- Measurement display: Inner-vision-field LCD display
- Effective objective lens aperture: 25 mm
- File coating: multiple file coating
- Outlet pupil diameter: 3.8 mm
- Outlet pupil distance: 12 mm

Alignment focus: eyepiece focusing adjustment

- Magnification: 6x
- Vision field within 1000 m: 122 m
- Modes of measurement: RAIN, RELF, >150
- Waterproof function
- Battery: Ix 3V CR2
- Dimensions: 120×72×43 mm
- Weight: 225g

WARRANTY

of the guarantor.

Your new precision laser range finder has a 12 month warranty against defects in material and/or workmanship provided that the unit has not been abused, used incorrectly, taken apart or serviced by any party other than Hawke Optics.

This warranty does not cover failure from fair wear and tear. This warranty is limited to the original purchaser and is not transferable. Your receipt of purchase should accompany any warranty claim. No guarantee can be given if dated proof of purchase is not supplied. Should any original defect appear, package the unit and return prepaid to the Service

The name, address and telephone number of the sender must be included in the package along with a note explaining the defect found. This guarantee is in addition to and does not affect any rights, which the consumer may have by virtue of the sale of goods act.

Manager at the address of your Hawke Optics

distributor, for repair or replacement at the option

Contact your retailer or distributor listed at:

www.hawkeoptics.com